



Cubicle system cronus



KEMMLIT For every demand

As market leader for washroom cubicles, our consulting service and installation. KEMMLIT offers a variety of high class solutions ranging from cubicles and lockers to entire washrooms. Everything we do is based on a clear commitment to the highest quality regarding products,

What sets us apart is qualified knowhow, state-of-the-art manufacturing and innovative design. For these reasons we have received numerous prizes and awards within the last few years.

What can we do for you?

For further information: www.kemmlit.de/cronus Status 01/2018









KEMMLIT For every der cronus Cubicle system cronus Sustainable cronus Standard cronus Support-optimis cronus Changing cubic cronus Glass cronus NR Details cronus Fittings cronus Planning aid **KEMMLIT** Supplementa cronus Colour concept YOUR KEMMLIT Project KEMMLIT Our promise



kemmlit.de

cronus At a glance

emand	2
1	4
	6
	7
ised	10
cles	11
	14
	15
	18
	20
ary products	24
t	25
ct	26
)	27





cronus support-optimised with recessed supporting legs, in cappuccino 1117

cronus Cubicle system

cronus is the cubicle system which unites design, and robustness with flexibility. Door and panel elements consist of 13 mm thick water-resistant solid grade (HPL) laminate panels with straight-lined profiles made of satin anodised aluminium. In addition to the coloured decorative layer a special overlay protects from wear, and abrasions as well as scratches. cronus is suitable for wet, humid and dry areas. Due to the intelligent construction cronus can be utilised according to the individual project requirements. Therefore cronus not only can be implemented as a WC cubicle system, but also as changing cubicle or shower separation in changing areas. All construction details are designed for high class appearance and years of failure-free functioning. A solid threeroller edge hinge made of high quality aluminium bolted six-times has been developed for cronus, which can withstand the strongest of demands for years. All doors can be created optionally as self-closing or self-opening. The supporting legs made of aluminium with stainless steel floor plate and aluminium cover sleeves are continuously height adjustable for optimal alignment to inclining floors. As an alternative to solid grade laminated panels we offer the high-class cronus glass solution made of 12 mm toughened safety glass for front and side panels and 8 mm toughened safety glass for partition panels and doors. cronus glass is ideal for discerning builders, designers and planer, who wish to combine the advantages of glass with the stability and longevity of cronus. cronus glass with supporting legs and headrail in the front, in white green 6504



 $\ensuremath{\mathsf{cronus}}$ meets the demands according to the $\ensuremath{\mathsf{DGNB}}$

cronus Sustainable

cronus meets the demands according to the **DGNB** and not only contributes to sustainability, but also to your building certification: the Deutsche Gesellschaft für Nachhaltiges Bauen e.v. (German Society for Sustainable Building, registered society) is a certification system for sustainable and economically efficient building in Germany. It serves the impartial description and evaluation of the sustainability of buildings and city districts. It is essential that the DGNB system never assesses single measures but always the overall performance of a building or city district. Furthermore KEMMLIT has been certified according to **DIN EN ISO 14001** and






thereby places emphasis on the area of environmental management. The ISO 14001 norm defines environmental management requirements, which enable a company to improve its environmental performance, fulfil legal and other obligations and reach environment objectives.



of The standard solution for cronus is created with supporting legs and head


created with supporting legs and head rail situated at the front. The under panel clearance consists of 150 mm with an adjusting range of -5/+25 mm for the best possible alignment for inclining floors. The supporting legs consist of high-quality aluminium with an aluminium or nylon cover sleeve. They are connected via a force-lock to the floor and the aluminium frame construction.





6

cronus with supp. legs and headrail in the front and with finger protection, in light grey 7208







cronus support-optimised with recessed supporting legs, in lemon green 6715

cronus Support-optimised

As an alternative cronus is available as a support-optimised construction, in which the supporting legs are situated in the partition panel. Invisible to the observer, visually perfect and easy to clean.

00 00



cronus changing cubicles with central locking and individual digital print

cronus Changing cubicles

cronus is ideally suitable for dry, humid or wet areas, as shower or changing cubicles as well as communal changing cubicles for outdoor and indoor swimming pools, leisure pools, spa and rehabilitation facilities, camp sites and fitness studios.

The changing cubicles are outfitted with bench seating and central locking system to close both cubicle doors. At customer request the cubicles can be additionally outfitted with mirrors, shelves or climb-over protection.




cronus glass, in traffic white 9317



cronus Glas, in traffic white 9317


cronus Glass

The sophisticated cronus glass solution consists of 12 mm toughened safety glass front and side panels as well as 8 mm toughened safety glass partition panels and doors. The basis of this cubicle solution is the supporting construction made of satin anodised aluminium profiles which mount the cubicle elements. The result is an extremely sturdy and long lasting partition system made of genuine glass. cronus glass can either be used as WC cubicles, changing cubicles or shower partitions. On request the option of combining the cubicle system with solid grade laminate HPL panels and glass elements is available.

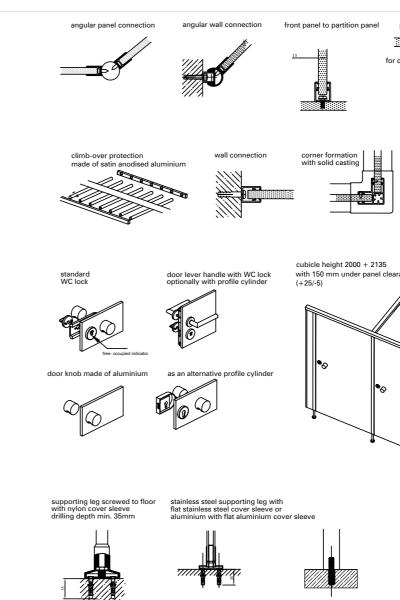

cronus NR Details

In the developing stage particular attention was paid to the connection elements and details. The high quality aluminium system structure with the aesthetic profiles and linear connections guarantees a robust and solid cubicle system.

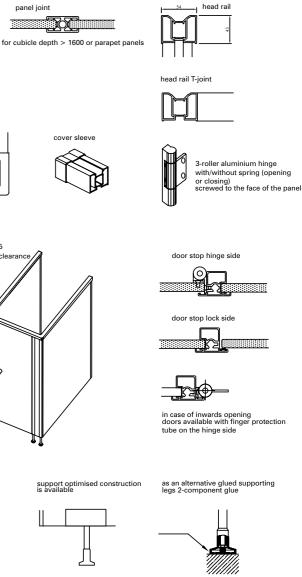



FeelSafe indicator






3-roller edge hinge made of aluminium with stainless steel axis





Finger protection with integrated hinges



Aluminium supporting leg in the front in a static connection with the profiles









cronus NR Details

Your advantages:

- Lock plate made of high quality aluminium
- WC lock made of metal, non-wearing and long-lasting
- The lock is very solid, non-flammable and corrosion-free
- Door knobs made of nylon, aluminium or stainless steel
- In addition our free-/occupied indicator on the inside of the
- cubicle ("FeelSafe") offers you a sense of security

Your advantages:

- The doors cannot be unhinged
- Maintenance-free bearing
- Vandal proof
- High stability
- Very long-lasting
- Non-flammable
- Self-closing or self-opening

Your advantages:

- The doors cannot be unhinged
- Prevents fingers from being jammed
- Vandal proof, maintenance-free


Your advantages:

- Multiple screw connections
- Outstanding stability and longevity due to static connection with M12 screw connection 100 % corrosion free



Wall connection profile with cover sleeve for custom-fit joint pattern






With solid stainless steel floor plate

Your advantages:

- Attractive design
- Lasting stability due to
- three-chamber profile
- No visible joints due to cover sleeve

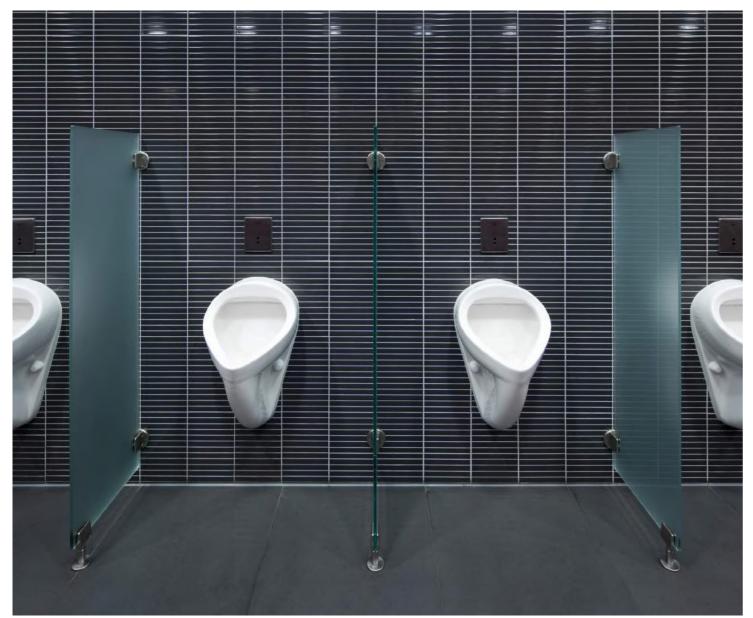

Modesty screens made of glass with supporting leg

cronus Fittings

Modesty screens are being included more and more into washroom or WC areas. Next to hygiene, privacy in particular plays a large role. cronus also offers individual solutions for this. The modesty screens can be realised in special widths and heights, with or without supporting legs. With our extensive accessories, such as paper roll holders or door stopper hooks the cronus cubicles can be outfitted completely. The accessories are available either in stainless steel, aluminium or nylon. Theft proof screw connections as well as harmonising colours and designs. The placement of the accessories is already considered within the overall planning.



cronus NR Planning aid



Cubicle system	cronus NR (wet area)	Optional for a surcharge
Floor plan	rows of cubicles and single cubicles, any room situation	 support opimised option (recessed supporting legs in the partition, headrail above the front max. front panel width (axis) > 250 mm, beyond that a supporting leg is necessary in case of gypsum plasterboard walls inlays or supporting legs are necessary special solutions possible
Cubicle height	• 2000 mm incl. 150 mm under panel clearance	 2135 incl. 150 mm under panel clearance any special height available (from 2135 mm with upper panel)
Under panel clearance	• Standard 150 mm, adjustable -5 mm / +25	 special sizes available without under panel clearance available (for anteroom partitions only)
Cubicle depth	• 1500 mm	 special depths available (from 1600 mm with joint, head rail, H-profile and supporting legs in the partition panel)
Panel material	• 13 mm solid grade HPL laminate panel with decorative layer	
Door material	• 13 mm solid grade HPL laminate panel with decorative layer	 as an option 8 mm TSG-glass or 30 mm aluminium composite element max. door panel height 2100 mm
Door stop	 multi-chamber aluminium profile with continuous rubber buffer for noise reduction 	
Door width	• 570 mm / 640 mm / 750 mm / 980 mm (nominal size)	special widths available
Swinging doors		 13 mm HPL with swing hinge made of stainless steel size min. W x H 250 x 600 mm, max. W x H 600 x 1400 mm
Head rail	• three-chamber profile, size W x H 54 x 43 mm in a square design	
Wall connection	• aluminium U-channel for straight wall connection	
Corner connection for corner cubicles	corner connection profile made of aluminium	
Angular wall connection		• aluminium U-channel
Angular panel connection		•aluminium profiles with U-channel
Upper panel		• 13 mm HPL max. W x H 1800 x 650 mm, larger widths have to be joint
Upper glass panel		 aluminium frame with clear glass TSG 6 mm optionally with acryl glass 5 mm, max W x H 1800 x 650 mm, larger widths with joint

Cubicle system	cronus NR (wet area)
Suspended construction	
Supporting legs/ floor connection	 satin anodised aluminium supporting le steel floor plate and aluminium or nylor 150 mm under panel clearance, steples
Hinges	 3-roller edge hinge made of aluminium (hinge roll Ø 20 mm), cannot be unhing with integrated spring – optionally for so closing or -opening doors, 3 hinges per
Finger protection	
Door knobs/single hand turning knob	 lock case made of aluminium or powder door knob made of nylon, with red/whit
Door lever handle	
Locks	• single latch lock
Central locking for changing cubicles	
Engravings	
Curtain rail	
Climb over protection	
Standard colours	according to the KEMMLIT colour chart
Special colour	
Digital print	
Compliance	TÜV certified, GS (tested safety)

Optional for a surcharge

	 bearer system made of aluminium powder-coated 50 x 150 mm (span width without support max. 3600 mm), or bearer system made of aluminium powder-coated 50 x 200 mm (span width without support max. 4500 mm)
legs with stainless on cover sleeve, ssly adjustable	 stainless steel supporting leg with stainless steel cover sleeve legs glued to floor (from 80 mm under panel clearance), not available for supp. optimised without under panel clearance only for anteroom partitions
n ged, self- er door	
	aluminium safety tube on the hinge side
der-coated with ite indicator	 door knob made of aluminium or stainless steel single hand turning knob made of aluminium
	 lock case made of aluminium with door lever handle made of aluminium, stainless steel or nylon profile cylinder lock possible
	 single latch profile cylinder lock double latch lock double latch profile cylinder lock
	 central locking underneath the bench seating overhead situated central locking
	 choice of standard symbols, numbers or text individual designs available
	 sliding rail made of satin anodised aluminium (integrated into the head rail) curtain gliders made of white plastic and curtain hooks made of metal
	 aluminium tubes satin anodised Ø 30 mm, axis 140 mm max. cubicle depth 1600 mm
rt	
	 special colours from all HPL-manufacturers possible, individual assessment necessary, longer delivery time
	• individual digital print available

Subject to technical changes 01/2018

cronus Glass Planning aid



Cubicle system	cronus GL (glass)	Optional for a surcharge
Floor plan	• rows of cubicles and single cubicles, any room situation	 support optimised option (recessed supporting legs in the partition, headrail above the front) in case of gypsum plasterboard walls either inlays or supporting leg is necessary, for front panel width (axis) as well as front panel wall connection panels > 250 mm a supporting leg in the front is necessary special solutions possible
Cubicle height	• 2000 mm incl. 150 mm under panel clearance	 2135 mm incl. 150 mm under panel clearance any special height available (from 2135 mm with upper panel)
Under panel clearance	• standard 150 mm, adjustable -5 mm / +25	 special sizes available, always including under panel clearance (min. 80 mm)
Cubicle depth	• 1500 mm	 special depths available (from 1600 mm with joint, head rail, H-profile and supporting legs in the partition panel)
Panel material	• 12 mm enamelled toughened safety glass (TSG) for front and side panels, 8 mm for partition panels	LSG (laminated safety glass)
Door material	• 8 mm enamelled toughened safety glass (TSG)	
Door stop	multi-chamber aluminium profile with continuous rubber buffer for noise reduction	
Door width	• 570 mm / 640 mm / 750 mm / 980 mm (nominal size)	• special widths available
Swinging doors	• not available	
Head rail	• three-chamber profile, size W x H 54 x 43 mm in a square design	
Wall connection	aluminium-U-channel for front and side panel, wall angle for partition panel	 for partition panels > 1600 mm with aluminium U-channel
Corner connection for corner cubicles	corner connection profile made of aluminium	
Angular wall connection		• aluminium U-channel
Angular panel connection		aluminium profile with U-channel
Upper panel		• 12 mm enamelled TSG, widths acc. to agreement
Upper glass panel		 aluminium frame with clear glass TSG 6 mm optionally with acryl glass 5 mm, max W x H 1800 x 650 mm, larger widths with joint

Cubicle system	cronus GL (glass)
Supporing legs / floor connection	 satin anodised aluminium supp. legs wi steel floor plate and aluminium cover sluunder panel clearance, steplessly adjust
Hinges	 3-roller edge hinge made of aluminium Ø 20 mm), cannot be unhinged, with int optionally for self-closing or -opening de 3 hinges per door
Door knobs / single hand turning knob	 lock case made of aluminium with door made of aluminium
Locks	single latch lock
Curtain rail	
Climb over protection	
Standard colours	according to KEMMLIT colour chart
Special colour	
Digital print	
Compliance	TÜV certified, GS (tested safety)

	optional for a surcharge
ith stainless leeve, 150 mm table	 stainless steel supp. leg with stainless steel cover sleeve legs glued to floor, not for supp. optimised 80 mm - 150 mm under panel clearance
(hinge roll tegrated spring – loors,	
r knob	 single hand turning knob made of aluminium profile cylinder lock made of aluminium grip hole drilling Ø 55 mm
	single latch profile cylinder lock
	 sliding rail made of satin anodised aluminium (integrated into the head rail) curtain gliders made of white plastic and curtain hooks made of metal
	 aluminium tubes satin anodised Ø 30 mm, axis 140 mm max. cubicle depth 1600 mm
	 special colours from all Glass-manufacturers possible, individual assessment necessary, longer delivery time
	 individual digital print individual silk-screen printing

Subject to technical changes 01/2018



Baby changing station Vigo made of plastic in grey

KEMMLIT Supplementary products

Further complementary products such as lockers, shelves, bench seating harmonise with cronus and complete the system perfectly. Sanitary accessories such as baby changing stations, nappy waste bins, door symbols and consumables etc. can be easily ordered for self-installation.

cronus Colour concept

cronus captivates with its variety of colours and combination possibilities. The selection is nearly boundless. Even special colours and individual digital prints are available on request.

Panels and doors made of HPL:

Traffic white 9317	Granite white 9317P	Light grey 7208	Qua
similar to NCS S 0502-G50Y		similar to NCS S 2500-N	simila
Cappuccino 1117	Burano brown 8617	Corn yellow 1708	Orai
similar to NCS S 3010-Y60R	similar to NCS S 6010-Y30R	similar to NCS S 1070-Y10R	simila
Garnet red 3708	Pacific blue 5715	Lagoon blue 5408	Silve
similar to NCS S 3060-R	similar to NCS S 2060-R90B	similar to NCS S 1030-R90B	
Panels and doors i	made of TSG:		



Dark red 3603 ähnlich NCS S 5040-R Structure SR200²

Profiles, hinges, furniture, supporting legs and accessories:



¹ For a surcharge also available in optiwhite (decoloured glass)

² Patterned glass, transparent, only available for doors

³ Profiles for glass cubicle only available in satin anodised 08

⁴ For accessories and supporting legs only

Please note, that the colours shown above may slightly differ from the original colour due to typographic reasons. We would gladly advise you personally.



ange **2717** lar to NCS S 0570-Y40F



ver 7408





similar to NCS S 0580-Y90R









Red 3117 similar to RAL 3013



similar to RAL 3003

Colour concept valid from 07/2017

Stainless steel V2A 124

YOUR KEMMLIT Project

KEMMLIT Our promise

Your layout:

_													_	_					
_														_					
													_	_					
_													_	_					
_														_					
_																			
_																			



98% of all requested delivery dates can be fulfilled



INSTALLATION

Prompt and on-schedule delivery



IMMEDIATE REPAIR

Immediate repair when you need it



QUALITY

Top quality in terms of material and processing



Individual consulting service by professional sales representatives

Your notes:

Please scan and send via email to: info@kemmlit.de. We will gladly advise you. Thank you.



FASTEST PRODUCTION &







KEMMLIT-Bauelemente GmbH | Maltschachstraße 37 | D-72144 Dusslingen Tel.: +49 (0) 7072 /1 31-0 | info@kemmlit.de | kemmlit.de